

REDLINE

by  **DYNAPAC**
FAYAT GROUP



- REDLINE Forward Plates
- REDLINE Reversible Plates
- REDLINE Cutters
- REDLINE Pokers and Drive Units

Drive Your Success - Build it Red!

FORWARD PLATE



REDLINE RV50

Operating mass: 53 kg
 Frequency: 100 Hz
 Amplitude: 2.4 mm
 Manufacturer/Power:
 Honda GX 160/4.1 kW @ 3,600 rpm



REDLINE RV80

Operating mass: 78 kg
 Frequency: 93 Hz
 Amplitude: 1.44 mm
 Manufacturer/Power:
 Honda GX 160/4.1 kW @ 3,600 rpm



REDLINE RV100

Operating mass: 104 kg
 Frequency: 93 Hz
 Amplitude: 0.95 mm
 Manufacturer/Power:
 Honda GX 160/4.1 kW @ 3,600 rpm



REDLINE RV140D

Operating mass: 137 kg
 Frequency: 93 Hz
 Amplitude: 0.85 mm
 Manufacturer/Power:
 Greaves 1520/3.72 kW @ 3,600 rpm

REVERSE PLATE



REDLINE RR150

Operating mass: 151 kg
 Frequency: 92 Hz
 Amplitude: 1.65 mm
 Manufacturer/Power:
 Honda GX 160/4.1 kW @ 3,600 rpm



REDLINE RR160D

Operating mass: 171 kg
 Frequency: 92 Hz
 Amplitude: 1.7 mm
 Manufacturer/Power:
 Hatz 1B20/3.3 kW @ 3,450 rpm



REDLINE RR180

Operating mass: 183 kg
 Frequency: 81 Hz
 Amplitude: 1.8 mm
 Manufacturer/Power:
 Honda GX 200/4.1 kW @ 3,450 rpm



REDLINE RR200D

Operating mass: 196 kg
 Frequency: 81 Hz
 Amplitude: 1.8 / 1.9 mm
 Manufacturer/Power:
 Hatz 1B20/Greaves 1520 / 3.3 kW @ 3,450 rpm/3.72 kw @ 3600 rpm

CUTTERS



REDLINE RC185

Operating mass: 129 kg
 Max. cutting depth: 185 mm
 Water tank capacity: 40 l
 Manufacturer/Power:
 Honda GX390/9.6 kW @ 3,600 rpm



DIAMOND CUTTER BLADE

Diameter: 500 mm Standard
 450 mm Optional



REDLINE RD36

Operating mass: 28 kg
Fuel tank capacity: 3.1 l
Manufacturer/Power:
Honda GX160/3.6 kW @ 3,600 rpm



REDLINE RD37D

Operating mass: 59kg
Fuel tank capacity: 4.1 l
Manufacturer/Power:
Greaves 1520/3.67kW @ 3,600 rpm



REDLINE RD22E

Operating mass: 28 kg
Battery type: Electrical single phase
Manufacturer/Power:
Branded / 2.2 kW @ 2800 rpm

DRIVE

POKERS



REDLINE RP45


Tube head diameter: 45 mm
Centrifugal force: 4.5 kN
Frequency: 12000 vpm



REDLINE RP60

Tube head diameter: 60 mm
Centrifugal force: 5.8 kN
Frequency: 11300 vpm

WALK BEHIND ROLLERS

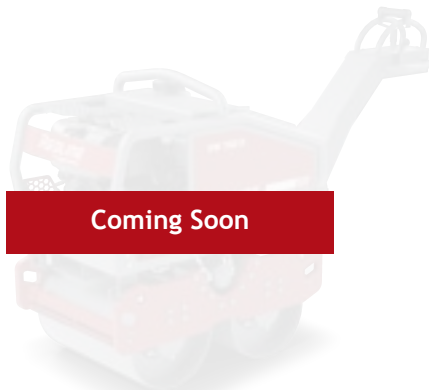

Coming Soon



RELIABLE

Rely on your equipment

- Do not compromise on quality, rely on the REDLINE products
- Easy operation and proven design ensure homogeneous results
- Convenient and professional support secures your equipment



EFFICIENT

Get it done efficiently

- Easy and simple machine built up provides the operator a clear and efficient working environment
- Reduces cost of ownership due to a lean machine design
- Maximize machine efficiency and security Dynapac Fleet management system



DURABLE

Built for tough work

- Powerful and durable equipment for demanding applications
- REDLINE uses high quality components for high wear resistance and long service intervals

Dealer's Stamp

**Dynapac Road Construction
Equipment (India) Pvt. Ltd.**

Plot No 1, Gat No. 163 - 168
Alandi Markala Road, Phulgaon,
Pune, Maharashtra - 412216
India

Email: customercare@dynapac.com
Customer Care No.: +91 7030626222