

REDLINE
by **DYNAPAC**
FAYAT GROUP



REDLINE Pneumatic Roller DRT 140

Exceptional performance

Balanced weight distribution with suitable width, an effective overlap, a proficient hydraulic system, and flexible ballast ensure outstanding performance and surface quality.

Ergonomics


The seat, steering wheel, and controls on both sides were designed to enhance visibility while driving.

Easy to service

All Service points are easy to access. Every tyre and scraper can be replaced separately.



The DRT140 incorporates several features that will enhance efficiency, serviceability, operator comfort and the end result. The lean operating platform design provides an excellent workplace for the operator, and the dual-circuit braking system ensures operator safety.

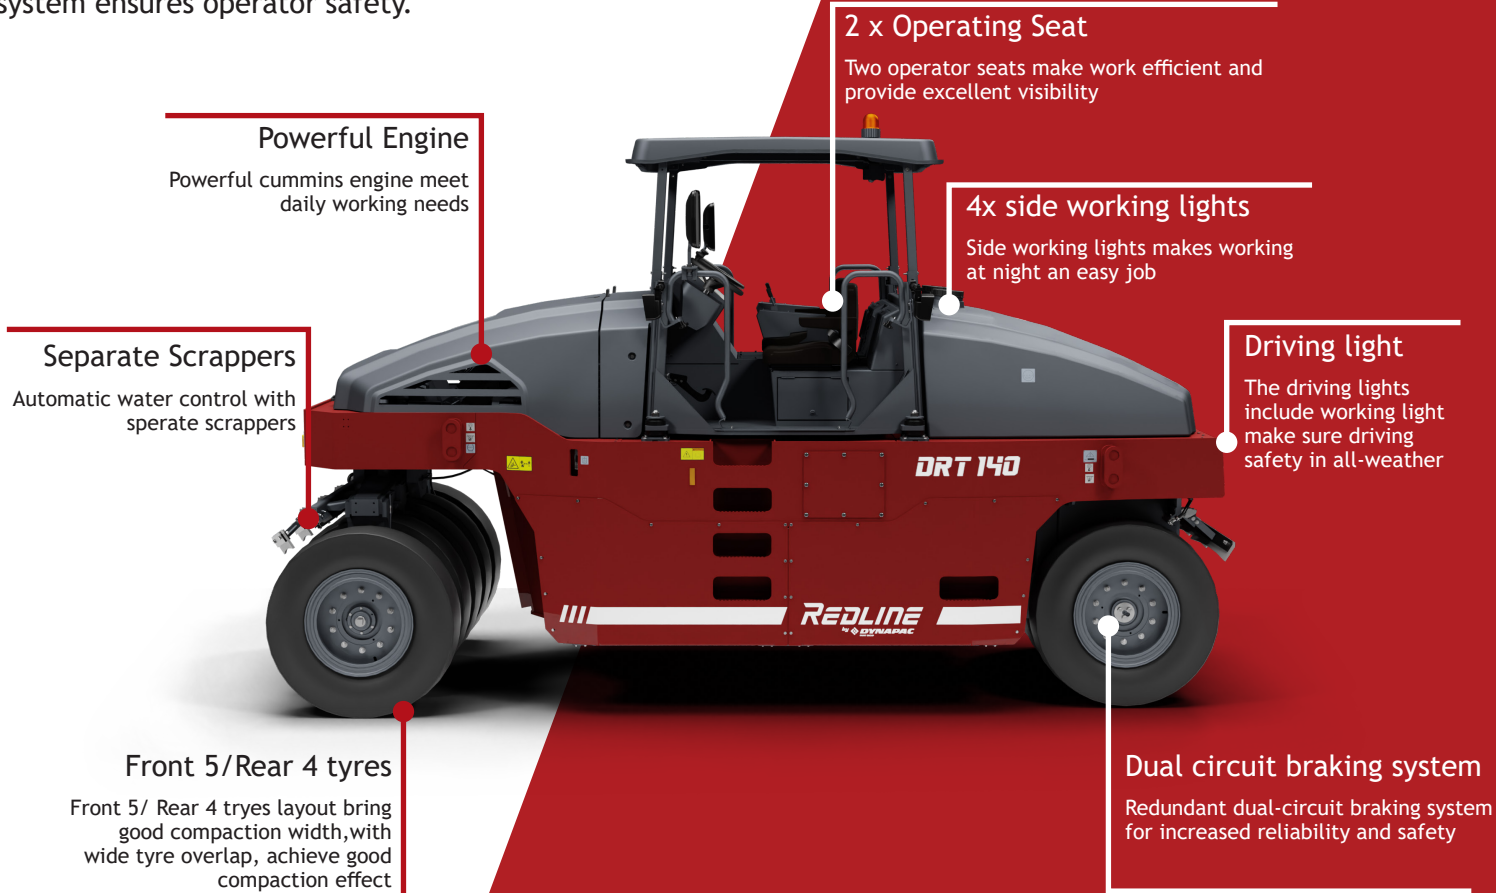

REDLINE DRT140

Specs	DRT140
Operating mass	14,000 kg
Max weight	26,000 kg
Rolling width	2,370 mm
Tyre overlap	52 mm
Wheel loads,without ballast	1,556 kg
Wheel loads,with max. ballast	2,889 kg
Manufacturer/Model	Cummins 4BTAA3.9 II/T2
Rated power	93 kW (125hp) @ 2200 rpm
Fuel tank capacity	320 L
Traction speed (low/high)	7 / 18 kmph

