

**RedLINE**

by **DYNAPAC**  
FAYAT GROUP

# REDLINE

## ASPHALT ROLLER



**DRA90**

## DRA90 - Efficient compaction, excellent surface finish and high productivity.

The 9T asphalt roller DRA90 offers efficient compaction and high productivity. The DRA90 roller is powered by robust Dynapac 4-cylinder diesel engine. With its wide drums and a high static linear load the DRA90 covers a wide range of application in very efficient way.

This economical asphalt roller is equipped with a spacious platform, ensuring excellent all-round visibility plus a simple and intuitive operating concept.

### Technical Data

Operating Weight	9200 kg
Static linear load	27.2 kg/cm
Drum width	1690 mm
Frequency (hi/low)	36 / 54 Hz
Amplitude (hi/low)	0.9 / 0.4 mm
Engine	Dynapac
Engine rated power	56 kW (76hp) @ 2200 rpm
Centrifugal force	130 / 60 kN
Water tank volume	800 ltrs

Water storage capacity of 800 l for longer operating time & lesser re-fills

Reliable water sprinkler system with triple filtration

Heavy duty maintenance-free steering hitch

Easily accessible service points


Vibration dampened & spacious operator platform

Position of the platform ensures all-around visibility

4-cylinder Dynapac engine

Reliable water sprinkler system with triple filtration

Two adjustable scrapers per drum

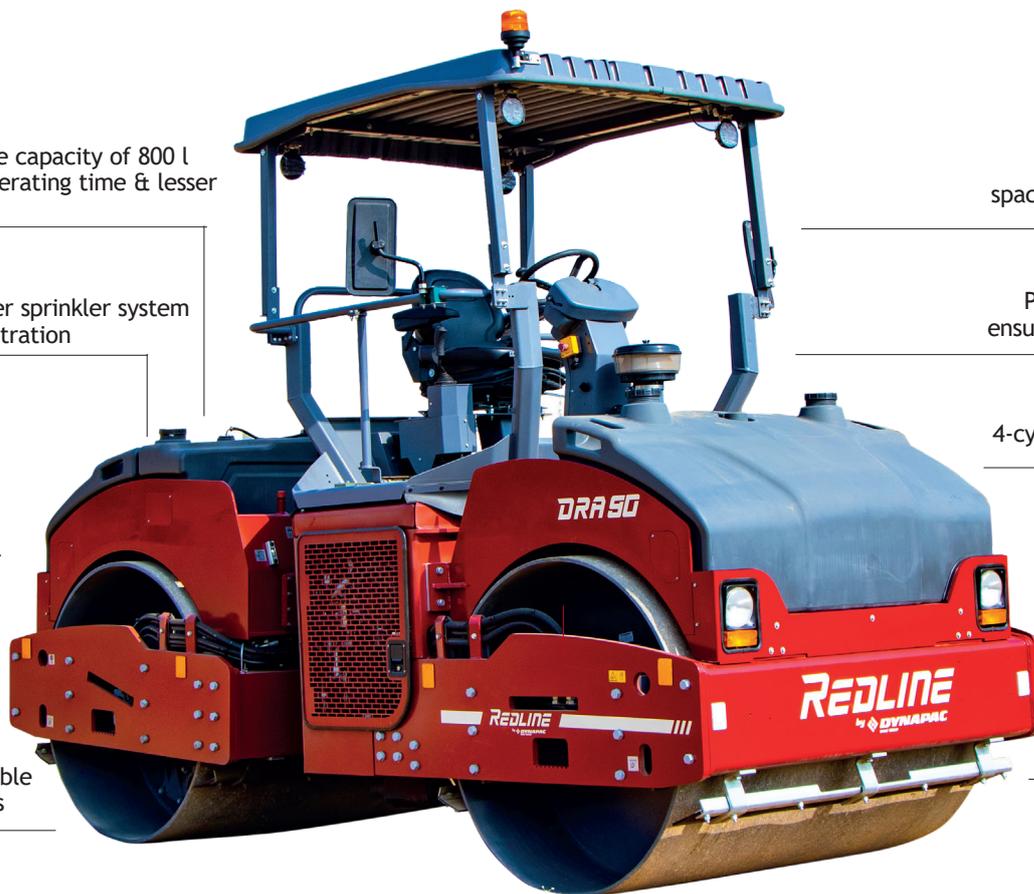

## Reliable asphalt roller for night jobsites

The outstanding visibility in combination with the light concept ensures excellent and uniform compaction - at night and during the day.





## Excellent surface finish and high productivity

- Adjustable frequency from 36 up to 54Hz
- Adjustable amplitude from 04 up to 0.9mm
- Ideal combination of 2 parameters for every layer
- Wide drum width of almost 1700mm



## Excellent visibility

- Spacious operator platform
- 1 m height x 0.6m away from machine front and rear object can see from seat
- Seat sliding along the width of machine for better drum edge visibility
- 4 LED lights for night works



## Reliable Dynapac engine with direct support

- Aftersales service & warranty support fully provided by REDLINE
- Quick responses through the dedicated REDLINE Dealer network
- Powerful and reliable engine maximizing uptime



## Safe and easy access to service and maintenance points

- Ground access to engine compartment
- Sturdy Steering hitch and pistons
- Advanced closed loop hydraulics
- Hydraulic oil refill only 55 lts every 2000 hrs
- Grouped components for convenient service



## Ergonomic and simple operator controls

- Machine drive lever ergonomically placed and sliding along with seat.
- Intuitive and simple operator dashboard
- Dashboard has a rigid and a lockable cover
- Easy to use rocker switches with large & easy to read symbols



## DYN@LINK - DYNAPAC CONNECTS THE FUTURE

Dyn@Link provides customers with a tool to monitor and manage their machine fleet efficiently and conveniently. The intelligent telematics system offers many possibilities to optimize fleet usage reducing maintenance costs, saving time and money.



### FLUIDS & LUBRICANTS

- Right Fluids as confirmed by product design
- Right size of packaging to avoid storage



### EXTENDED WARRANTY

- Extended warranty for peace of mind
- Service agreement to ensure higher uptime



### TAILOR MADE TRAININGS

- Various training modules geared towards our customers requirements

## Reliable Aftermarket Support - Solutions to fit



### MAINTENANCE KITS

- All-in-one box concept for ease of ordering
- Designed to cover full maintenance
- Cost effective as well as easy to plan



### WEAR & REPAIR KITS

- All-in-one box package for ease of ordering
- Right quality at right cost, for minimum cost of operation
- Different options to suit all maintenance

## Dealership Details

